




Costes/
Beautifully decor



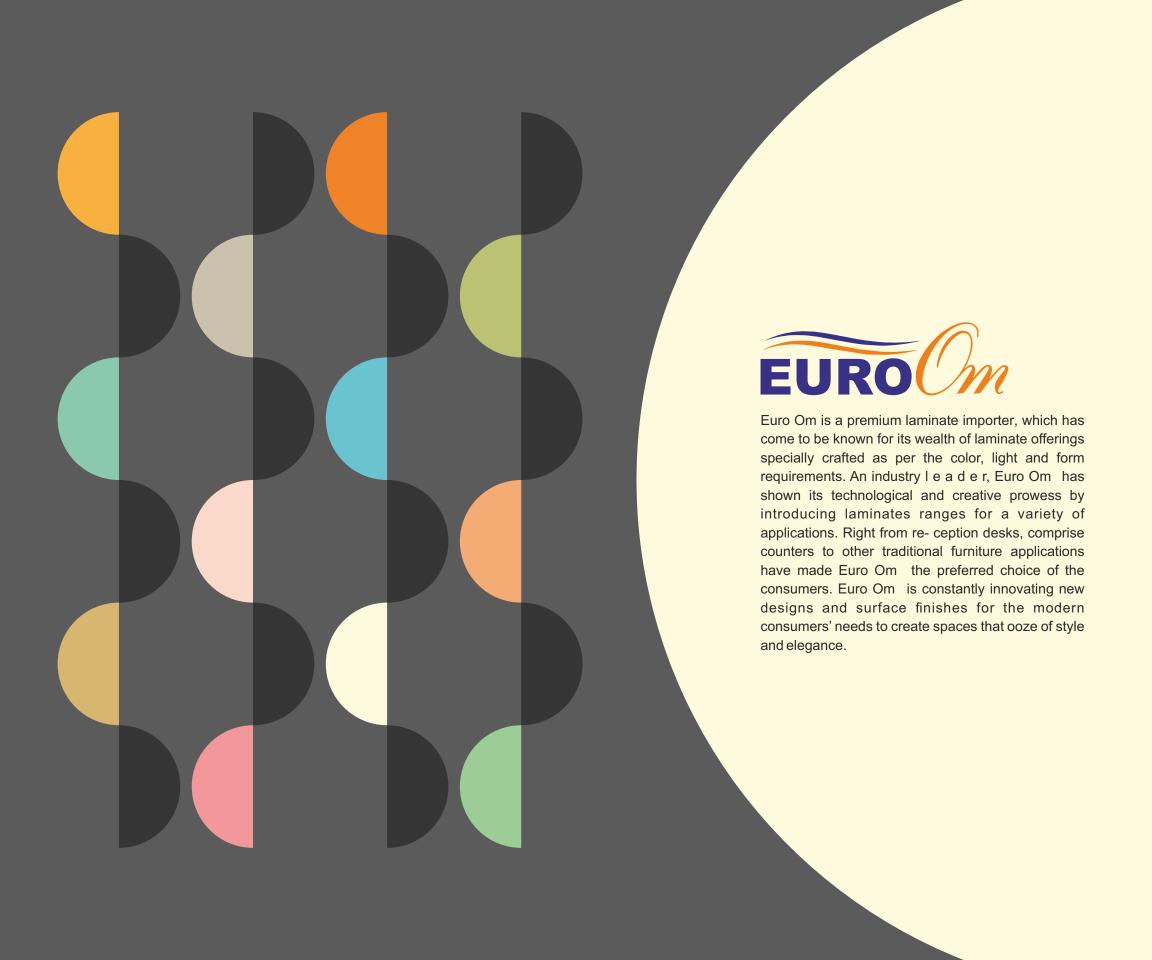

#### **Kitchen**

Worktops • Tables • Doors Shelves • Cabinets • Trolleys



Worktops • Shelves Cabinets



**Furniture** 



**Commercial** 



#### **Healthcare**

Wall Lining And Horizontal **Surfaces Lockers Cabinets Trolleys** 



**Wall Cladding** & Partition







#### **CLEANING INSTRUCTION AND MAINTENANCE**

EUROOM High gloss acrylic laminates comes protected with a high-quality protective film which is only removed at the completion of all installation work. After the protected film is removed, there is still presence of solvent from the adhesive • Shake it well coating of the protective film on the surface and lightly spray of the high gloss acrylic laminate. An on the surface electrostatic charge is built-in and attracts dust onto the surface of the panel.

During this time, the acrylic laminate surface also cures out under the influence of normal air humidity. Under normal circumstances, the 'Curing' process will take approximately 72 hours for the surface to be totally cured. In order to speed up the process, we recommend cleaning the high gloss surface with COLIN Glass Cleaner and soft Micro fibre cloth.



1.5mm THICKNESS



TERMITE & **BORER FREE** 



**DURABILITY & STRENGTH** 



LIGHT WEIGHT



WATER & **STAIN PROOF** 



**IDEAL FOR VERTICAL** APPLICATION

#### Available in Size:


2440mm X 1220mm (8ft X 4 ft)

Thickness: 1.5 ~ 1.3 mm









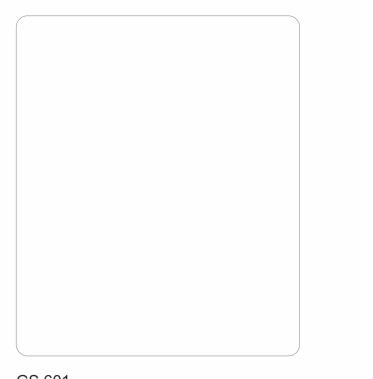


GS 602

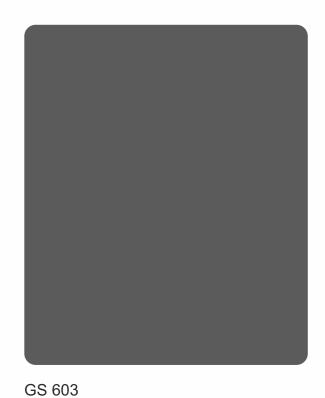

GS 601

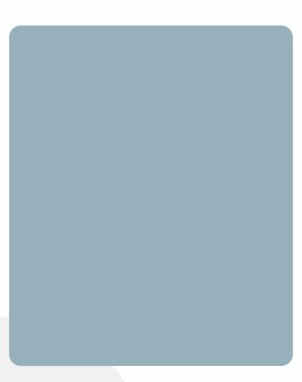

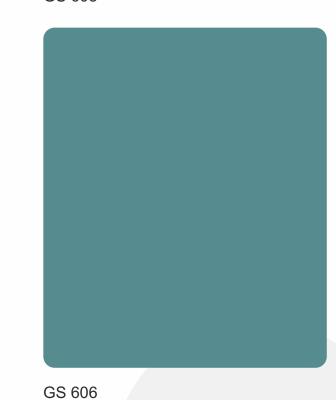

GS 604 GS 605








GS 610 GS 611

GS 612






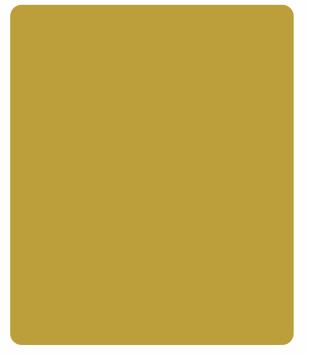







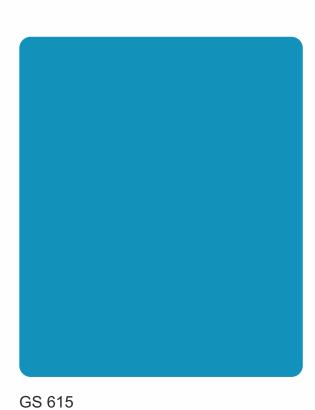



GS 613

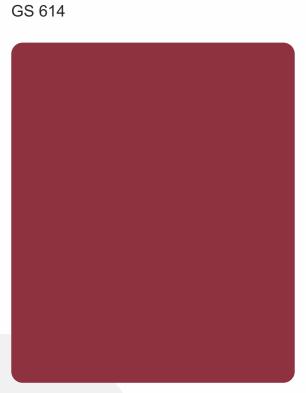

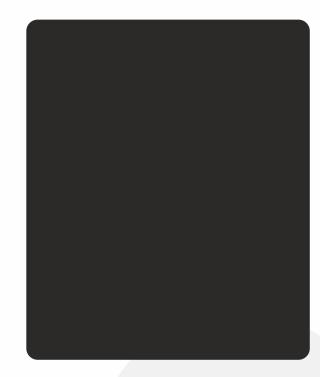

GS 616 GS 617

GS 618





Used Laminate GS 634







GS 630 PR




GS 632 PR



GS 631 PR



GS 633 PR

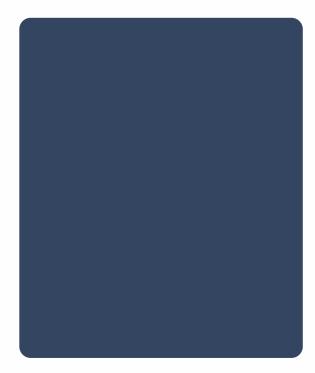


GS 619




GS 634 PR








GS 635 PR

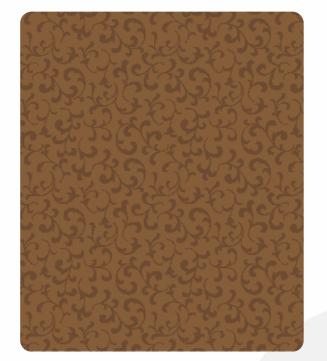

GS 638 PR

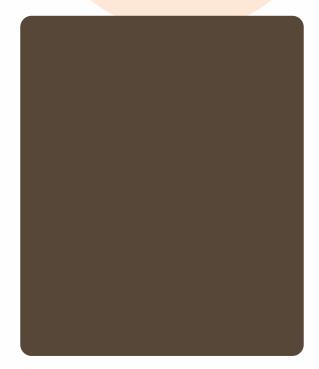

GS 636 PR



GS 639 PR



GS 637 PR



GS 640 PR







GS 641 PR

**GS 644 PR** 




GS 642 PR



GS 645 PR




GS 643 PR

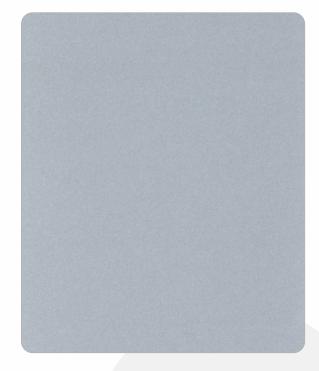


GS 646 PR









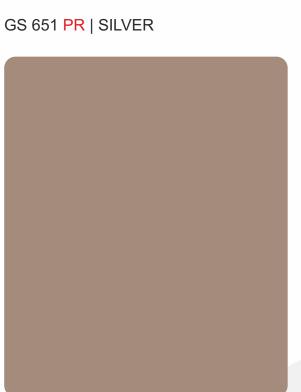

GS 653 PR | ROSE GOLD

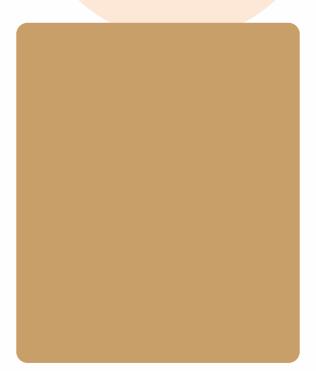

GS 652 PR | GOLD

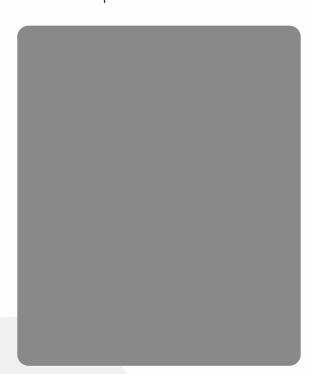

GS 654 PR | GREY



# Parameters comparision



Parameters	Euro Om Acrylic Laminate	High Gloss Laminate Mica	PU coating/ Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisractch	NO	NO	NO
Color Consistency	Excellent	Not good	Not good	Not good
Orange peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	NO	YES	YES	YES


<sup>\*</sup>There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminate sheet may vary from this brochure.

Size: 2440 mm x 1220 mm (8ft X 4ft) Thickness: (1.5mm~ 1.3 mm)

# LO-FRIENDS 2 100% E



## PANEL STRUCTURE

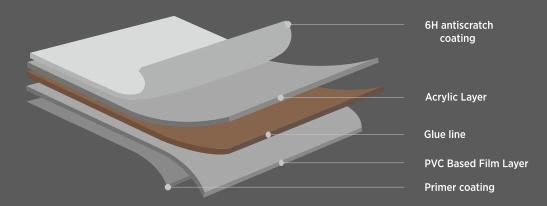

## INDEX



DESIGN NO.	DESIGN	PAGE NO.
GS 601	SOLID COLOR	02
GS 602	SOLID COLOR	02
GS 603	SOLID COLOR	02
GS 604	SOLID COLOR	02
GS 605	SOLID COLOR	02
GS 606	SOLID COLOR	02
GS 607	SOLID COLOR	04
GS 608	SOLID COLOR	04
GS 609	SOLID COLOR	04
GS 610	SOLID COLOR	04
GS 611	SOLID COLOR	04
GS 612	SOLID COLOR	04
GS 613	SOLID COLOR	06
GS 614	SOLID COLOR	06
GS 615	SOLID COLOR	06
GS 616	SOLID COLOR	06
GS 617	SOLID COLOR	06
GS 618	SOLID COLOR	06
GS 619	SOLID COLOR	08
GS 630	METALLIC COLOR	08

DESIGN NO.	DESIGN	PAGE NO.
GS 631	METALLIC COLOR	08
GS 632	METALLIC COLOR	08
GS 633	METALLIC COLOR	08
GS 634	METALLIC COLOR	08
GS 635	METALLIC COLOR	10
GS 636	METALLIC COLOR	10
GS 637	METALLIC COLOR	10
GS 638	FLORAL DESIGN	10
GS 639	FLORAL DESIGN	10
GS 640	METALLIC COLOR	10
GS 641	METALLIC COLOR	12
GS 642	METALLIC COLOR	12
GS 643	METALLIC COLOR	12
GS 644	METALLIC COLOR	12
GS 645	METALLIC COLOR	12
GS 646	METALLIC COLOR	12
GS 651	MIRROR FINISH	14
GS 652	MIRROR FINISH	14
GS 653	MIRROR FINISH	14
GS 654	MIRROR FINISH	14



Website: www.omsalescorp.com Email: omsalecorporation1969@gmail.com